
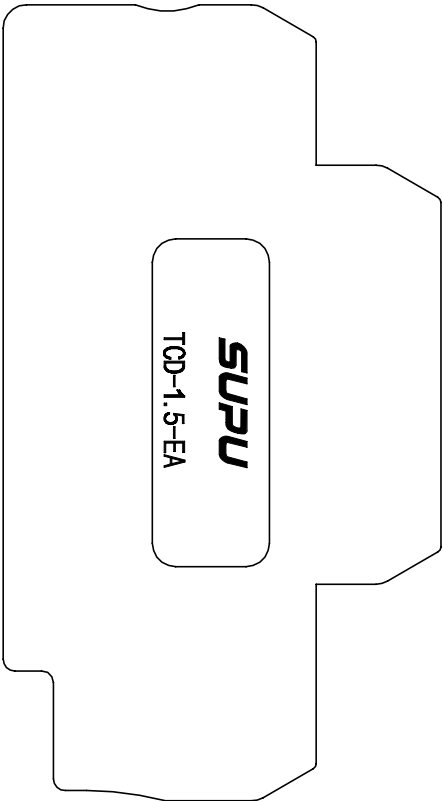



Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited.

未经允许禁止传输、复制、编辑该文档，以及利用其内容进行交流

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE
△	DCN0006226	图纸更新	董方正 2020/1/07

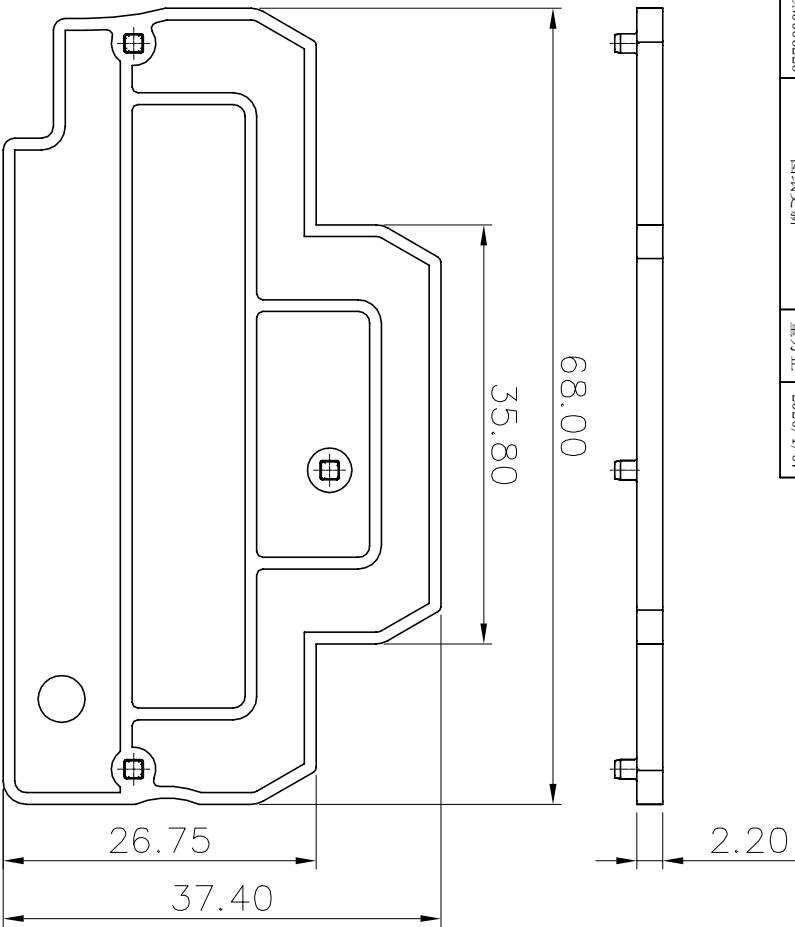

HOW TO ORDER:

TCD1.5-2-XX-EA

Sereies No. Color: GY: Grey BU: Blue OG: Orange

NOTES:

Material:

Insulator	PA66	UL94 V-0
-----------	------	----------

General information:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Operating temperature: -40°C~+105°C
- 3.RoHS Compliance
- 4.Undimensioned Tolerances:

Pitch Range		In mm		Nominal Dimension		Range		Tolerance	
mm	Over	Over	In mm	Over	Over	Over	Over	-	+ / 0
TO 6	TO 10	TO 10	TO 30	TO 60	TO 100	TO 150		0.1/10	
TO 6	TO 10	TO 24	TO 30	TO 60	TO 100	TO 150		<	
±0.15±0.20±0.30±0.30±0.50±0.70±1.00±1.30 ±2°									

订货号	TCD1.5-2-XX-EA		名称	TC系列箔式弹簧 1.5mm 双层 接线端子端板		公差	表面
Order No.	签字	日期	Name	PRM001124		Tolerances	Table
Item	Signature	Date	Drawing No.	Notes		Progress	Revision
设计	dfz	01/06/20	材料			M	1
Design	dfz	01/06/20	Material				
审核	cw	01/06/20	物料号	412110001		第1页/共1页 1 of 1	
Check	cw	01/06/20	Item No.	412110002		重量 比例	
工艺	-	-	批准	412110003		1:1	
Process	-	-	批准	412110003		/	
Standard	-	-	批准	412110003		mm	
Unit	-	-	批准	412110003			
Approve	lwl	01/06/20	批准	412110003			

SUPU 宁波睿普电子有限公司
NINGBO SUPU ELECTRONICS CO.,LTD.