

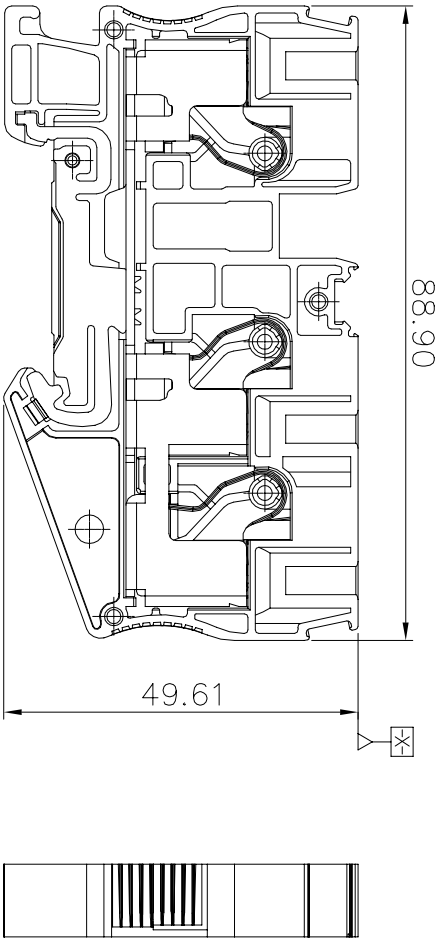



REVISION RECORD			
REV	ECN	DESCRIPTION	DATE

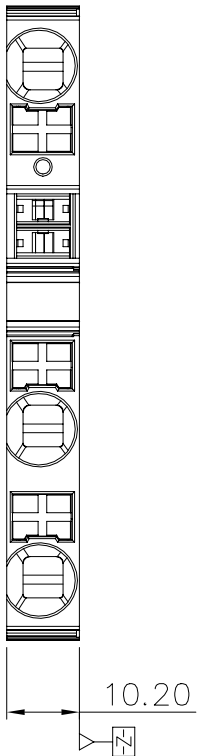

- Connection method:
1. For Solid wire, peel wire in right length, push down the wire.
 2. For flexible wire, peeling wire in right length, pushdown the key & fix the wire, or wire furred and fix then.

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited.

未经允许禁止传输、复制、编辑该文档，以及利用其内容进行交流

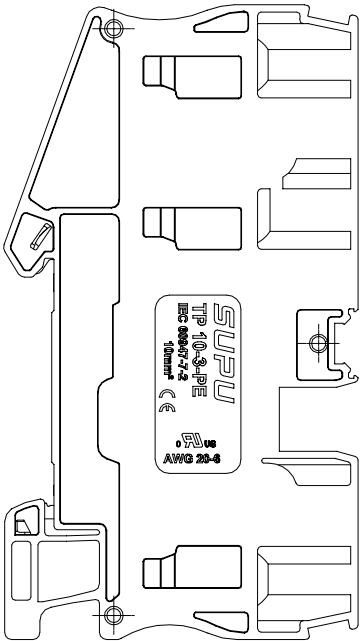

HOW TO ORDER:

TP10-3-PE

Series No. Color: PE:Yellow Green

NOTES:

UL/CUL Standard

1. Conductor cross section : 20~6AWG

IEC Standard

1. Conductor cross section :

Wire range(Solid/Stranded)	0.5-10mm ²
Solid	0.5-16mm ²
Stranded	0.5-10mm ²
Stranded with ferrules	0.5-10mm ²
Stranded with plastic sleeve	0.5-10mm ²
Stranded with ferrules with plastic sleeve	0.5-10mm ²

2. Rated Voltage/Current :

Surge voltage category	III
Pollution degree	3
Rated surge voltage(KV)	8

Material:

Insulator	PA66	UL94 V-0
Conductor	Copper alloy	Sn plated
Spring	Stainless steel	
Button	PA66	UL94 V-0
Ground pin	Copper alloy	Sn plated

General information:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Stripping length : 18mm
- 3.Operating temperature:-40°C~+105°C
- 4.RoHS Compliance
- 5.Undimensioned Tolerances:

Pitch Range		Nominal Dimension		Range			
mm	In mm	mm	In mm	mm	In mm	-	+
Over 6	Over 10	Over 30	Over 60	Over 100	Over 150	0.1	10
TO 6	TO 10	TO 30	TO 60	TO 100	TO 150		
6	10	24	30	60	100	150	
±0.15		±0.20		±0.30		±1.00	
						±1.30	
						±2°	

订货号 Order No.	TP10-3-PE	名称 Name	TP系列直插式弹簧 10mm一进两出接地端子	公差 Tolerance	表面处理 Surface
项目 Item	签字 Signature	日期 Date	图号 Drawing No.	阶段标记 Progress	版本 Revision
设计 Design	CW	06/17/19	PRM001874	见公差表	VDI21
审核 Check	CW	06/17/19	Material	见NOTES	
工艺 Process	-	-	物料号 Item No.	第1页/共1页 1 of 1	重量 Weight
标准化 Unity	-	-	412204008		比例 Scale
批准 Approve	LWL	06/17/19			1:1

SUPU 宁波速普电子有限公司

NINGBO SUPU ELECTRONICS CO., LTD.