


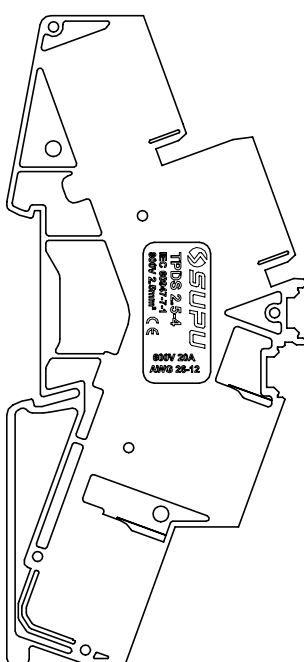

HOW TO ORDER:
TPDS2.5-4-XX
_____T

-Color:
GY: Grey
BU: Blue
OG: Orange

UL/CUL Standard

- | Use group | B | C | D |
|------------------|-----|-----|---|
| Rated voltage(V) | 600 | 600 | |
| Rated current(A) | 20 | 20 | |

1. Conductor cross section :

0.2–2.5mm ²
0.2–4mm ²
0.2–2.5mm ²
0.2–2.5mm ²
0.2–2.5mm ²

Surge voltage category	III
------------------------	-----

III
3
6
800
20

General information:

PA66	UL94 V-0
Copper alloy	Sn plated
Stainless steel	

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Stripping length : 8-10mm
- 3.Operating temperature: -40°C~+105°C
- 4.RoHS Compliance
- 5.Undimensioned Tolerances:

Nominal Dimension mm	Range				— C □
	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	
0±0.50	±0.70	±1.00	±1.30		±2°

未注公差 Tolerance	表面 Surface	
见公差表	VD121	
版本号 Revision Number	重量 Weight	比例 Scale
M1	/	1:1
第1页/共1页 1 of 1	 mm	