

ERP610W471MDRU

Aliases (C831DR471M760J, ERP610VH3470MDRU)

Obsolete

ERP610 SFTY X1-760 Y1-500, Ceramic, 470 pF, 20%, 760 VAC (X1), 500 VAC (Y1), Y5U, 10 mm

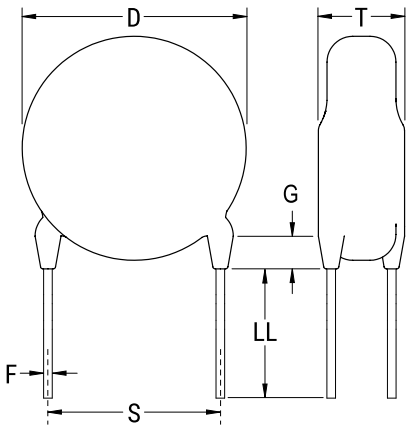



The measurement position of Lead Spacing (S) and Width (V) is critical in straight lead capacitors.

Click here for the 3D model.

General Information	
Gruppe	ERP610 SFTY X1-760 Y1-500
Typ	Radial Disc
Beschreibung	Ceramic Single Layer Safety Disc Capacitors
RoHS	Yes
Terminierung	Tin
Zulassungen	UL, CSA, CAN, ENEC, VDE
Hinweise	Please See Bulletin For Taping Information. H Dimension Refers to Seating Plane To Center Hole of Tape.

Dimensions	
D	8mm MAX
H	18mm +2mm
T	5mm MAX
S	10mm +/-0.8mm
F	0.6mm +/-0.05mm
G	3mm MAX
V	2.1mm +/-0.5mm

Specifications	
Kapazität	470 pF
Kapazitätstoleranz	20%
Sicherheitsspannungsanzeige	760 VAC (X1), 500 VAC (Y1)
Temperaturbereich	-40/+125°C
Temperaturkoeffizient	Y5U
Verlustfaktor	2.5%
Isolationswiderstand	10 GOhms
Sicherheitsklasse	X1/Y1

Packaging Specifications	
Verpackung	T&R, H = 18mm, Component Pitch = 25.4mm

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

© 2006 - 2026 YAGEO