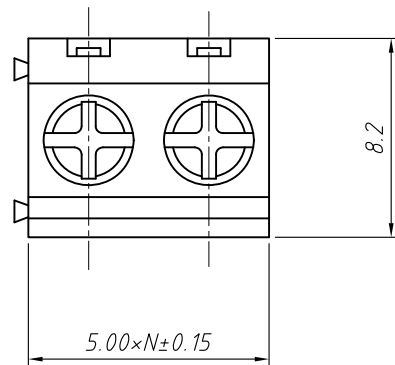
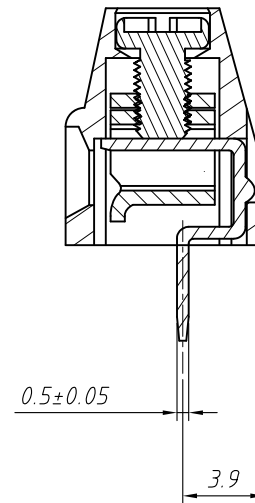
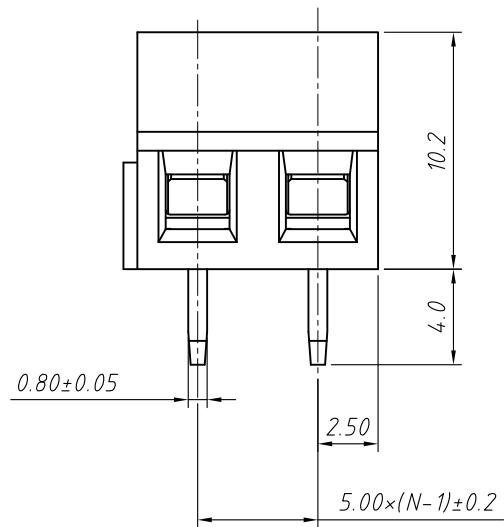


PCB LAYOUT

Material

Housing: PA66, UL 94V-0
Clamp: Brass, Ni plated
Pin Header: Brass, Tin plated
Screw: M2.5, steel Zinc plated

Electrical

Rated voltage: 300V
Rated current: 8A
Contact Resistance: 20 mΩ
Insulation resistance: 500MΩ/DC500V
Withstand voltage: AC2000V / 1 min
Wire Range: 26~16AWG 1.5mm²

Mechanical

Temp. Range: -40 °C ~ +105 °C
Strip length: 6~7mm
Torque: 0.4Nm (3.5Lb.in)

Order Information

L-KLS2-127-5.00-XXP-4 S 00

RoHS
Terminal Block
Pitch
No. of Pole
Color: 4- Green
Screw: S-Slot Screw
Product Code: 00~99

GENERAL TOLERANCE		ANGLE TOLERANCE	Description:
X. ±0.60		X. ±5°	Screw CONN TERM Block 5.00mm
.X ±0.38		.X ±3°	
.XX ±0.25		.XX ±2°	
Draw by	2015-09-01	PROJECTION	 NingBo KLS ELECTRONIC CO.,L TD.
Check by	2015-09-15	UNITS	
SCALE		SHEET SIZE	
		A4	