
Thyristor Modules

TYPE:SKKT215/16E

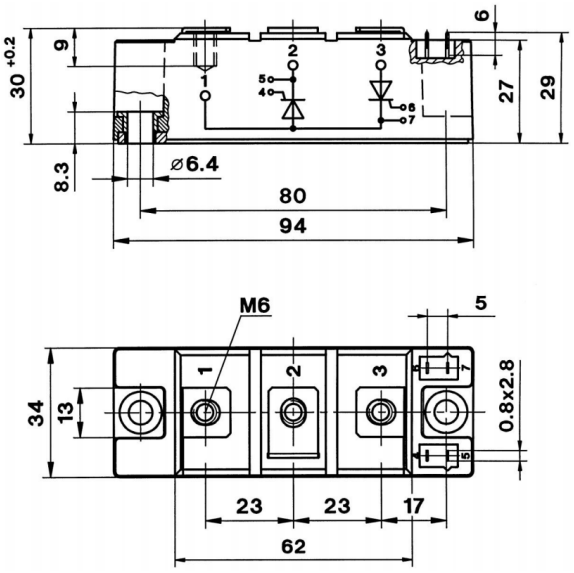

V_{DRM}	V_{RRM}	V_{RSM}
1600V	1600V	1700V

Features

- Heat transfer through aluminium nitride ceramic isolated metal baseplate
- Precious metal pressure contacts for high reliability
- Thyristor with amplifying gate

Typical Applications

- DC motor control
- AC motor starters
- Temperature control
- Professional light dimming

Symbol	Conditions	Values	Units
$I_{T(AV)}$ $I_{F(AV)}$	sin. 180; T_C=85°C	215	A
IT_{RMS}		-	
I_{TSM}	T_{vj}=25°C; 10ms	7000	A
I^2t	T_{vj}=25°C; 8.3…10ms	245	KA^2s
V_T	T_{vj}=25°C; I_T=600A	max. 1.5	V
I_{DD} I_{RD}	T_{vj}=125°C; V_{RD}=V_{RRM}; V_{DD}=V_{DRM}	max. 60	mA
t_{gd}	T_{vj}=25°C; I_G=1A; di_G/dt=1A/µs;	1	µs
t_{gr}	V_D=2/3V_{DRM}	2	
$(di/dt)_{cr}$	T_{vj}=125°C	max. 200	A/µs
$(dv/dt)_{cr}$	T_{vj}=125°C	max. 1000	V/µs
t_q	T_{vj}=125°C	150	µs
I_H	T_{vj}=25°C; typ. /max.	150/400	mA
I_L	T_{vj}=25°C; R_G=33Ω; typ. /max.	300/1000	mA
V_{GT}	T_{vj}=25°C; d.c.	2	V
I_{GT}	T_{vj}=25°C; d.c.	150	mA
V_{GD}	T_{vj}=125°C; d.c.	max. 0.25	V
I_{GD}	T_{vj}=125°C; d.c.	max. 10	mA
$R_{th(j-c)}$	per thyristor /per module	0.12/0.06	K/W
$R_{th(c-s)}$	per thyristor /per module	0.125/0.065	K/W
T_{vj}		-40…+125	°C
T_{stg}		-40…+125	°C
V_{isol}	a.c. 50Hz; r.m.s.; 1s/1min.	3600/3000	V