



F

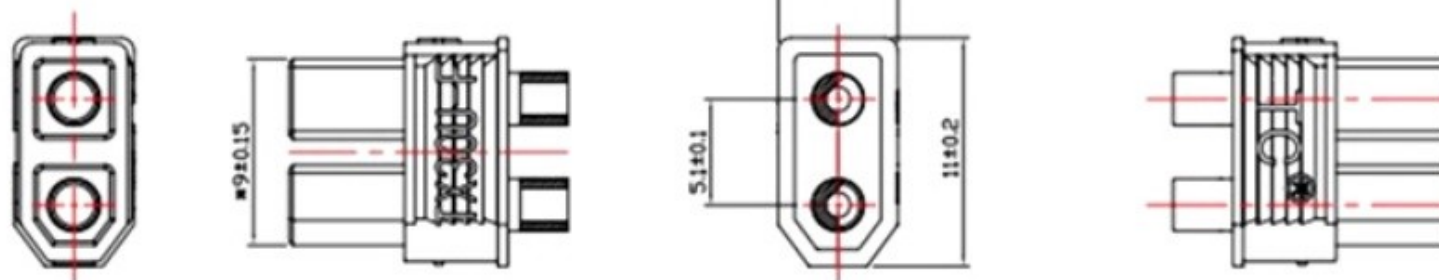

M

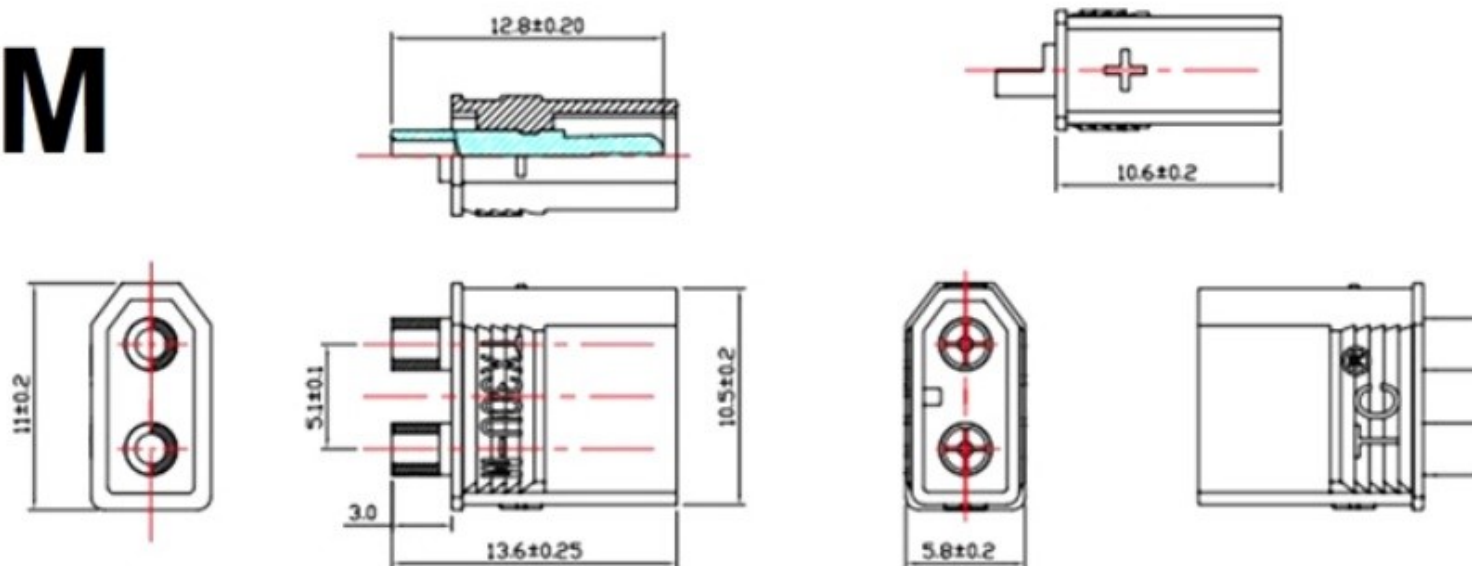

Product model: XT30 M+F
 Instantaneous current: 30A
 Rated current: 15A
 Rated voltage: DC500V
 Contact resistance: 0.55mΩ

Insulation material: PA
 Working temperature: -20--120 degrees Celsius
 Recommended wire gauge: 16AWG 18AWG
 Recommended use times: 1000TIMES
 Flame retardant rating: UL94VO