


HD Series, Crimp Connection, 25 pin, Femle insert

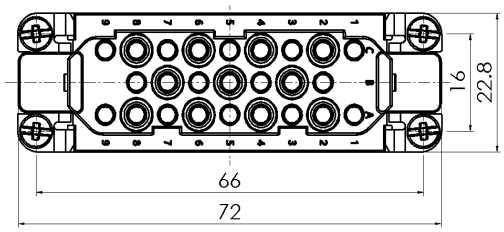



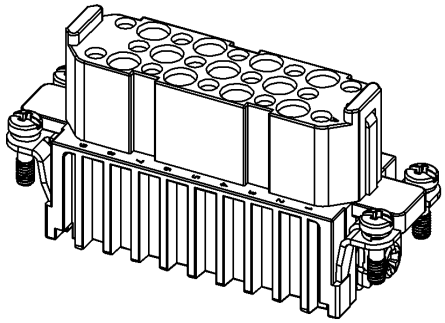

Typecode HD-025-FC

ID 1 007 03 0000072

Technical Data

Product Properties	
Series	HD
Mating with	H16A
Connection mode	Crimp termination
Gender	Femle
Rated voltage	250 V
Rated current	10 A
Rated impulse voltage	4 kV
Mating contact	10A (DSF/DGF)
Number of pins	25
Core cross-section/Clamping ability	0.14~ 2.5 mm²/AWG26 ~ AWG14
Grounding conductor	Yes
Pollution degree	3
Insulation resistance	$\geqslant 10^{10}\ \Omega$
Limiting temperature	-40 ℃ ~ +125 ℃
Standard	EN 60664-1, IEC 61984

Insert	
Material	PC
Colour	RAL 7032

Commercial data	
Weight	0.034 kg
Packaging unit	10 pc
Country of origin	CN

Features

- High quality engineering plastics
- Crimp termination
- ⩾500 Mating cycles
- Approval: CE
- RoHS-compliant

*The design data are listed here,and the changes to the product are not described here.For unfinished matters,please contact customer service.It is the user's responsibility to verify functionality,compliance with applicable laws and instructions,and electrical safety in specific applications。