


HK Series, Screw connection, 4 pin, Male insert

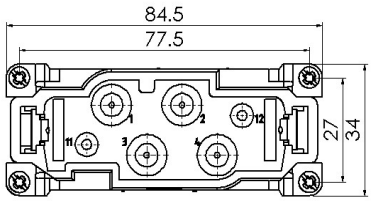





Typecode **HK-004/0-M**

ID **1 007 03 0000099**

Technical Data

Product Properties	
Series	HK
Mating with	H16B
Connection mode	Screw connection
Gender	Male
Rated voltage	830 V
Rated current	80 A
Rated impulse voltage	8 kV
Number of pins	4
Core cross-section/Clamping ability	1.5~ 16 mm² / 10 AWG
Grounding conductor	Yes
Pollution degree	3
Insulation resistance	$\geqslant 10^{10}\ \Omega$
Temperature range	-40 ℃ ~ +125 ℃
Standard	EN 60664-1, IEC 61984

Insert	
Material	PC
Colour	Gray (RAL 7032)

Commercial data	
Weight	0.113 kg
Packaging unit	5 pcs
Country of origin	CN

Features

- High quality engineering plastics
- Screw connection
- ⩾500 Mating cycles
- Approval: CE, UL
- RoHS-compliant

*The design data are listed here,and the changes to the product are not described here.For unfinished matters,please contact customer service.It is the user's responsibility to verify functionality,compliance with applicable laws and instructions,and electrical safety in specific applications。