
HS65-1000A-C Current Transducer

DESCRIPTION:

For the electronic measurement of current: DC, AC, pulsed ..., with galvanic separation between the primary and the secondary circuit.

FEATURES:

- Open loop using the Hall effect
- The primary side and the secondary side are isolated
- Low power consumption
- Wide range
- No insertion loss
- Raw materials recognized according to UL 94-V0.

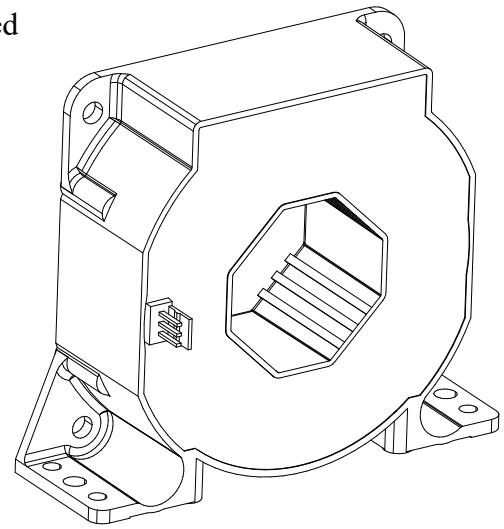

APPLICATIONS:

- Inverter
- Uninterruptible Power Supplies (UPS)
- Static converters for DC motor drives
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications
- Battery management.

MODEL LIST:

PRODUCT MODEL		
Model	**Rated input current I_{PN} (A)**	**Measuring range I_{PM} (A)**
HS65-1000A-C	1000	± 1500

HS65-1000A-C SPECIFICATION

Parameter	Symbol	Unit	Value	Test Conditions
Electrical Data				
Supply voltage (±5%) (1)	V_C	V	±15 ~±24V	
Current consumption	I_C	mA	28+ output current	
Output current Isn	Isn	mA	200	
Overcurrent capability (1ms)	I_{PC}	At	-	
Insulation resistance	R_{IS}	MΩ	> 2000	@500VDC
Internal impedance	R_S	Ω	40	approximation
Load Resistor (2)	R_M	Ω	0~18	
Performance Data				
Linearity (3) (0…± I_{PN})	ε_L	%of I_{PN}	<±0.1%	@T_A = 25°C
Precision	X	%	<±0.4%	@ I_{PN} , T_A = 25°C (remove zero offset current)
Zero offset current	I_{OE}	mA	<±0.4	@ $I_{P=}$ 0 , T_A=25°C
Magnetic offset current	I_{OM}	mA	<±0.2	@ I_P = 0; 3 times the rated current impact
Zero offset temperature drift	I_{OT}	mA	<±0.8	@ I_P =0 , @ -40 ~ +85 °C
Response time	t_r	μS	<1	@ 90% of I_{PN} step response
Current follows d_i/d_t	d_i/d_t	A/μS	>100	
Bandwidth (4)	BW	kHz	DC~150	@-3dB
General Data				
Ambient operating temperature	T_A	℃	-40….+85	
Storage ambient temperature	T_S	℃	-40….+100	
Mass	m	g	550	approximation

Notice:

(1) Under the power supply condition of ± 15 V≤VC＜± 24 V, the measurement range of the sensor will be reduced;

(2) If the customer uses a load resistance of 0~18 Ω, the current to be measured needs to be limited to the rated current. If the full-scale current is to be measured, the load resistance should be within 0~4 Ω;

(3) Linearity data does not include zero offset.


Insulation data:

Parameter	Symbol	Unit	Value	Remark
AC isolation withstand voltage test RMS @ 50Hz, 1min	U_D	KV	3.8	
Impulse withstand voltage 1.2/50uS	U_W	KV	16	
Shell material	-	-	UL94-V0	PBT+30%GF
Relative tracking index	CTI	V	175	
Creepage distance	d_{CP}	mm	21	
Electrical clearance	d_{CI}	mm	20	

Maximum limit :

Parameter	Symbol	Unit	Value
Supply voltage	V_C	V	±24
Output current (output shorted to ground)	I_{out}	mA	-
Electrostatic discharge - contact discharge	V_{ESD}	V	-

Dimensions(in mm):

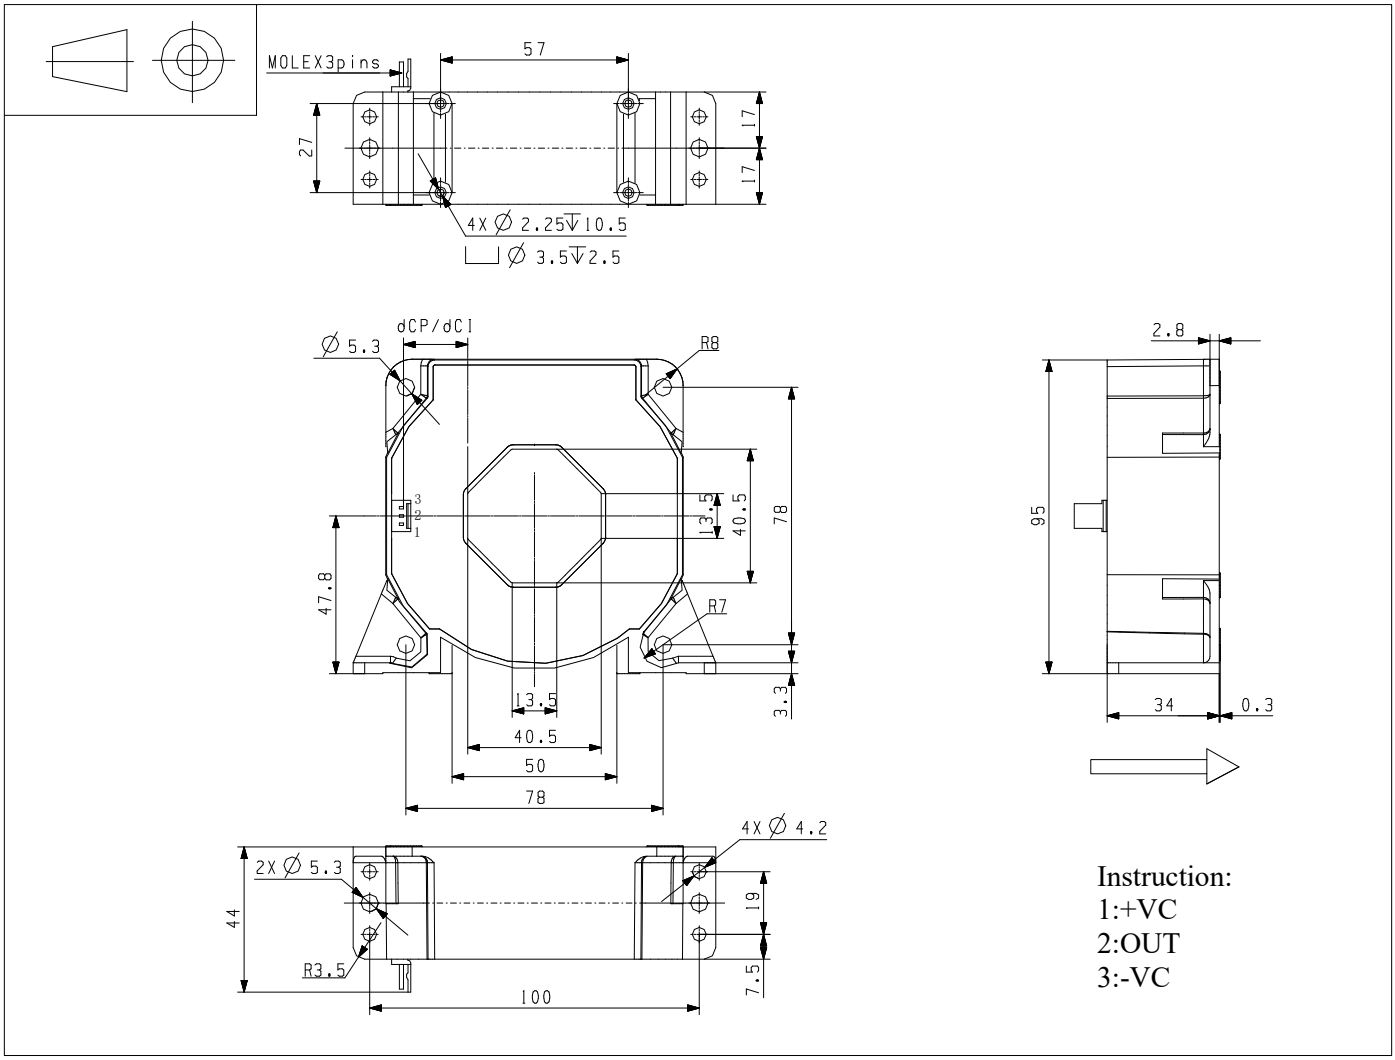

Safety

This device must be used according to IEC610101.

This device must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the operating instructions.

Caution, risk of electrical shock.

When operating the device, certain parts can carry hazardous voltage (eg. primary busbar, power supply). Ignoring this warning can lead to injury and/or cause serious damage.
This is a builtin device, whose conducting parts must be inaccessible after installation.
A protective housing or additional shield can be used.
Main supply must be able to be disconnected.