


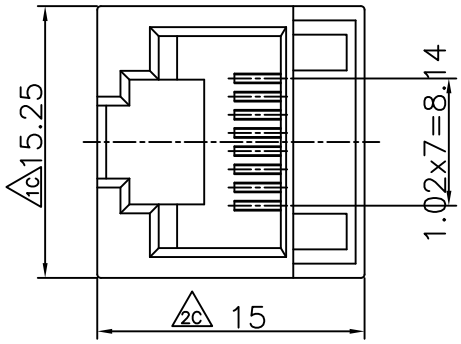


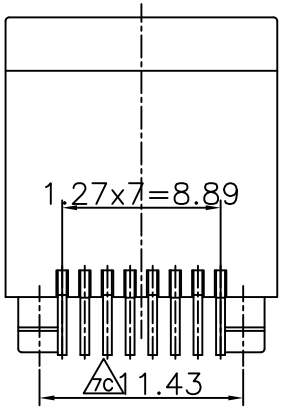

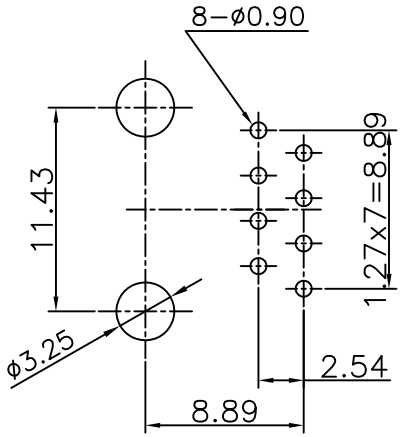

PCB LAYOUT/TOP VIEW

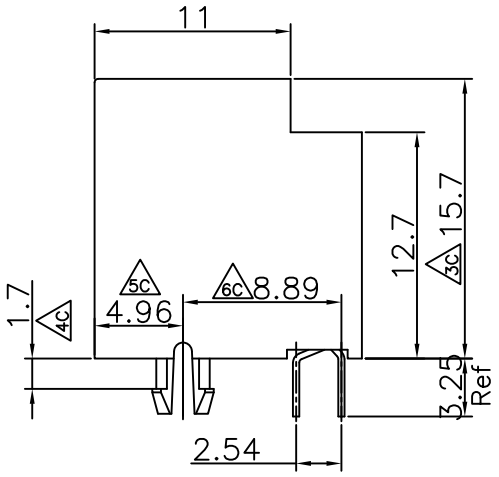

Electrical:

1.Voltage Rating:	125 Vac Rms
2.Current Rating:	1.5 Amp
3.Contact Resistance:	40 Milliohms Max
4.Insulation Resistance:	1000 Megohms Min@500 Vdc
5.Dielectric Strength:	1000 Vac Rms 60Hz,1Min

Mechanical:

1.Operating:	750 Cycles Min

Environmental:

1.Storage:	-40°C To +85°C
2.Opertion:	-20°C To +75°C

Mates With Modular Plug Conforming To FCC Part 68,Subpart F

Notes：

MATERIALS

HOUSING:	ENGINEERING THERMOPLASTIC FLAMMABILITY UL 94V-0
CONTACTS:	PHOSPHOR BRONZE
PLATING:	GOLD PLATING OVER NICKEL IN CONTACT TIN PLANTING OVER NICKEL IN SOLDER AREA

TOLERANCE UNLESS OTHERWISE SPECIFIED		CUSTOMER COPY	KLS ELECTRONIC CO., LTD	
LINER	ANGLES		PROD. DESCRIP.	TOP ENTRY PCB JACK (RJ45 8P8C)
0 ± 0.50	± 3°	PROJECTION	L-KLS12-152-8P8C-S-B-03	
.0 ± 0.38				
.00 ± 0.25				

			UNIT	SCALE	SIZE	REV.
ROHS	DESIGN		MM	/	A4	B
	APPRO.					