

#### Is Now Part of



# ON Semiconductor®

# To learn more about ON Semiconductor, please visit our website at www.onsemi.com

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at <a href="www.onsemi.com">www.onsemi.com</a>. Please email any questions regarding the system integration to Fairchild <a href="general-regarding-numbers-n

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officer



August 2016

Single-Channel: 6N138M, 6N139M Dual-Channel: HCPL2730M, HCPL2731M 8-Pin DIP Low Input Current High Gain Split Darlington Optocouplers

#### **Features**

- Low Current 0.5 mA
- Superior CTR 2000%
- Superior CMR 10 kV/µs
- CTR Guaranteed 0 to 70°C
- Dual Channel HCPL2730M, HCPL2731M
- · Safety and Regulatory Approvals
  - UL1577, 5,000 VAC<sub>RMS</sub> for 1 Minute
  - DIN EN/IEC60747-5-5

#### **Applications**

- · Digital Logic Ground Isolation
- · Telephone Ring Detector
- · EIA-RS-232C Line Receiver
- High Common Mode Noise Line Receiver
- μP Bus Isolation
- Current Loop Receiver

#### Description

The single-channel, 6N138M, 6N139M and dual-channel HCPL2730M, HCPL2731M optocouplers consist of an AlGaAs LED optically coupled to a high gain split darlington photodetector.

The split darlington configuration separating the input photodiode and the first stage gain from the output transistor permits lower output saturation voltage and higher speed operation than possible with conventional darlington phototransistor optocoupler. In the dual channel devices, HCPL2730M and HCPL2731M, an integrated emitter-base resistor provides superior stability over temperature.

The combination of a very low input current of 0.5 mA and a high current transfer ratio of 2000% makes this family particularly useful for input interface to MOS, CMOS, LSTTL and EIA RS232C, while output compatibility is ensured to CMOS as well as high fan-out TTL requirements. An internal noise shield provides exceptional common mode rejection of 10 kV/ $\mu$ s.

#### **Related Resources**

- www.fairchildsemi.com/products/optoelectronics/
- www.fairchildsemi.com/pf/HC/HCPL0700.html
- www.fairchildsemi.com/pf/HC/HCPL0730.html
- www.fairchildsemi.com/pf/HC/HCPL0731.html

#### **Schematics**




Figure 1. Schematics

#### **Package Outlines**




Figure 2. Package Options

## **Safety and Insulation Ratings**

As per DIN EN/IEC 60747-5-5, this optocoupler is suitable for "safe electrical insulation" only within the safety limit data. Compliance with the safety ratings shall be ensured by means of protective circuits.

| Parameter   | Parameter                               |           |
|---|---|-----------|
|   | < 150 V <sub>RMS</sub>                  | I–IV      |
| Latellatia Olas if at a part DINIVE   | < 300 V <sub>RMS</sub>                  | I–IV      |
| Installation Classifications per DIN VDE 0110/1.89 Table 1, For Rated Mains Voltage | < 450 V <sub>RMS</sub>                  | I–III     |
| Trovinso lable 1,1 st read walls voltage  | < 600 V <sub>RMS</sub>                  | I–III     |
|   | < 1,000 V <sub>RMS</sub> (Option T, TS) | I-III     |
| Climatic Classification   |   | 40/100/21 |
| Pollution Degree (DIN VDE 0110/1.89)  |   | 2         |
| Comparative Tracking Index  |   | 175       |

| Symbol                | Parameter   | Value             | Unit              |  |  |
|-----------------------|---|-------------------|-------------------|--|--|
| V                     | Input-to-Output Test Voltage, Method A, $V_{IORM}$ x 1.6 = $V_{PR}$ , Type and Sample Test with $t_m$ = 10 s, Partial Discharge < 5 pC                    | 2,262             | V <sub>peak</sub> |  |  |
| V <sub>PR</sub>       | Input-to-Output Test Voltage, Method B, $V_{IORM} \times 1.875 = V_{PR}$ , 100% Production Test with $t_m = 1$ s, Partial Discharge < 5 pC 2,651 $V_{pe}$ |                   |                   |  |  |
| $V_{IORM}$            | Maximum Working Insulation Voltage  | 1,414             | V <sub>peak</sub> |  |  |
| $V_{IOTM}$            | Highest Allowable Over-Voltage  | 6,000             | V <sub>peak</sub> |  |  |
|                       | External Creepage   | ≥ 8.0             | mm                |  |  |
|                       | External Clearance  | ≥ 7.4             | mm                |  |  |
|                       | External Clearance (for Option TV, 0.4" Lead Spacing)   | ≥ 10.16           | mm                |  |  |
| DTI                   | Distance Through Insulation (Insulation Thickness)  | ≥ 0.5             | mm                |  |  |
| T <sub>S</sub>        | Case Temperature <sup>(1)</sup>   | 150               | °C                |  |  |
| I <sub>S,INPUT</sub>  | Input Current <sup>(1)</sup>  | 200               | mA                |  |  |
| P <sub>S,OUTPUT</sub> | Output Power (Duty Factor ≤ 2.7%) <sup>(1)</sup>  | 300               | mW                |  |  |
| R <sub>IO</sub>       | Insulation Resistance at T <sub>S</sub> , V <sub>IO</sub> = 500 V <sup>(1)</sup>  | > 10 <sup>9</sup> | Ω                 |  |  |

#### Note:

1. Safety limit value - maximum values allowed in the event of a failure.

## **Absolute Maximum Ratings**

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.  $T_A = 25^{\circ}C$  unless otherwise specified.

| Symbol           | Parameter               | Value          | Unit |
|------------------|-------------------------|----------------|------|
| T <sub>STG</sub> | Storage Temperature     | -40 to +125    | °C   |
| T <sub>OPR</sub> | Operating Temperature   | -40 to +100    | °C   |
| $T_J$            | Junction Temperature    | -40 to +125    | °C   |
| T <sub>SOL</sub> | Lead Solder Temperature | 260 for 10 sec | °C   |

| Symbol                 | Parameter Device   |                      | Value        | Unit |
|------------------------|--|----------------------|--------------|------|
| EMITTER                |  |                      |              |      |
| I <sub>F</sub> (avg)   | DC/Average Forward Input Current Per Channel                       | All                  | 20           | mA   |
| I <sub>F</sub> (pk)    | Peak Forward Input Current Per Channel (50% duty cycle, 1 ms P.W.) | All                  | 40           | mA   |
| I <sub>F</sub> (trans) | Peak Transient Input Current Per Channel (≤ 1 µs P.W., 300 pps)    | All                  | 1            | Α    |
| $V_{R}$                | Reverse Input Voltage Per Channel                                  | All                  | 5            | V    |
| P <sub>D</sub>         | Input Power Dissipation Per Channel <sup>(2)</sup>                 | All                  | 35           | mW   |
| DETECTOR               |  |                      |              |      |
| I <sub>O</sub> (avg)   | Average Output Current Per Channel                                 | All                  | 60           | mA   |
| V <sub>ER</sub>        | Emitter-Base Reverse Voltage                                       | 6N138M,<br>6N139M    | 0.5          | V    |
|                        | Supply Voltage Output Voltage                                      | 6N138M,<br>HCPL2730M | -0.5 to 7.0  | V    |
| $V_{CC}, V_{O}$        | Supply Voltage, Output Voltage                                     | 6N139M,<br>HCPL2731M | -0.5 to 18.0 | V    |
| Po                     | Output Power Dissipation Per Channel                               | All 100              |              | mW   |

#### Note:

2. No derating required for devices operated within the T<sub>OPR</sub> specification (6N138M and 6N139M only).

#### **Electrical Characteristics**

#### **Individual Component Characteristics**

( $V_{CC}$  = 5.0 V,  $T_A$  = 0°C to 70°C unless otherwise specified. Typical value is measured at  $T_A$  = 25°C.)

| Symbol                    | Parameter                                  | Device            | Test Conditions  | Min. | Тур.   | Max. | Unit  |
|---------------------------|--|-------------------|--|------|--------|------|-------|
| EMITTER                   |  |                   |  | •    |        |      |       |
| \/                        | Input Forward Voltage                      | All               | I <sub>F</sub> = 1.6 mA, T <sub>A</sub> = 25°C             |      | 1.30   | 1.70 | V     |
| $V_{F}$                   | Imput Forward voltage                      | All               | I <sub>F</sub> = 1.6 mA                                    |      |        | 1.75 | V     |
| $BV_R$                    | Input Reverse<br>Breakdown Voltage         | All               | I <sub>R</sub> = 10 μA, T <sub>A</sub> = 25°C              | 5.0  | 19.0   |      | V     |
| $\Delta V_F / \Delta T_A$ | Temperature Coefficient of Forward Voltage | All               | I <sub>F</sub> = 1.6 mA                                    |      | -1.94  |      | mV/°C |
| DETECTO                   | R  |                   |  |      |        |      |       |
|                           | Logic Low Supply                           | 6N138M,<br>6N139M | $I_F$ = 1.6 mA, $V_O$ = Open,<br>$V_{CC}$ = 18 V           |      | 0.4    | 1.5  | A     |
| ICCL                      | Current                                    | HCPL2730M         | $V_{CC} = 7 \text{ V}$ $I_{F1} = I_{F2} = 1.6 \text{ mA},$ |      | 1.25   | 3    | mA    |
|                           |  | HCPL2731M         |  |      | 1.23   | 3    |       |
|                           | Logic High Supply                          | 6N138M,<br>6N139M | $I_F = 0$ mA, $V_O = Open$ ,<br>$V_{CC} = 18$ V            |      | 0.0003 | 10   |       |
| I <sub>CCH</sub>          | Current                                    |                   | $V_{CC} = 7 \text{ V}$ $I_{F1} = I_{F2} = 0 \text{ mA},$   |      | 0.0003 | 20   | μA    |
|                           |  | HCPL2731M         | $V_{CC} = 18 \text{ V}$ $V_{O1} = V_{O2} = \text{Open}$    |      | 0.0003 | 20   |       |

#### **Transfer Characteristics**

| Symbol   | Parameter                                 | Device    | Test Conditions   | Min. | Тур.   | Max. | Unit |
|----------|---|-----------|---|------|--------|------|------|
| COUPLED  |   |           |   |      |        |      |      |
|          |   | 6N138M    | I <sub>F</sub> = 1.6 mA, V <sub>O</sub> = 0.4 V,                        | 300  | 1600   |      |      |
|          |   | HCPL2730M | V <sub>CC</sub> = 4.5 V   | 300  | 2400   |      |      |
| CTR      | Current Transfer                          | 6N139M    | $I_F = 0.5 \text{ mA}, V_O = 0.4 \text{ V},$                            | 400  | 2000   |      | %    |
| CIK      | Ratio <sup>(3)(4)</sup>                   | HCPL2731M | V <sub>CC</sub> = 4.5 V   | 400  | 3500   |      | /0   |
|          |   | 6N139M    | I <sub>F</sub> = 1.6 mA, V <sub>O</sub> = 0.4 V,                        | 500  | 1600   |      |      |
|          |   | HCPL2731M | V <sub>CC</sub> = 4.5 V   | 300  | 2400   |      |      |
|          |   | 6N138M    | I <sub>E</sub> = 0 mA, V <sub>O</sub> = V <sub>CC</sub> = 7 V           |      | 0.001  | 250  | μA   |
| Levi     | I <sub>OH</sub> Logic High Output Current | HCPL2730M |   |      | 0.001  | 200  |      |
| ЮН       |   | 6N139M    | $I_{\rm F} = 0 \text{ mA}, V_{\rm O} = V_{\rm CC} = 18 \text{ V}$       |      | 0.0036 | 100  |      |
|          |   | HCPL2731M | 1F - 0 111A, VO - VCC - 10 V  |      |        | 100  |      |
|          |   | 6N138M    | I <sub>F</sub> = 1.6 mA, I <sub>O</sub> = 4.8 mA,                       |      | 0.06   | 0.4  |      |
|          |   | HCPL2730M | V <sub>CC</sub> = 4.5 V   |      | 0.05   | 0.4  |      |
|          |   | 6N139M    | $I_F = 0.5 \text{ mA}, I_O = 2 \text{ mA},$<br>$V_{CC} = 4.5 \text{ V}$ |      | 0.05   | 0.4  |      |
| \        | Logic Low Output Volt-                    | 6N139M    | I <sub>F</sub> = 1.6 mA, I <sub>O</sub> = 8 mA,                         |      | 0.093  | 0.4  |      |
| $V_{OL}$ | age <sup>(4)</sup>                        | HCPL2731M | V <sub>CC</sub> = 4.5 V   |      | 0.08   | 0.4  | V    |
|          |   | 6N139M    | I <sub>F</sub> = 5 mA, I <sub>O</sub> = 15 mA,                          |      | 0.13   | 0.4  |      |
|          |   | HCPL2731M | V <sub>CC</sub> = 4.5 V   |      | 0.12   | 0.4  |      |
|          |   | 6N139M    | I <sub>F</sub> = 12 mA, I <sub>O</sub> = 24 mA,                         |      | 0.18   | 0.4  |      |
|          |   | HCPL2731M | V <sub>CC</sub> = 4.5 V   |      | 0.17   | 0.4  |      |

#### Notes:

- Current Transfer Ratio is defined as a ratio of output collector current, I<sub>O</sub>, to the forward LED input current, I<sub>F</sub>, times 100%.
- 4. Pin 7 open. (6N138M and 6N139M only)

#### **Electrical Characteristics** (Continued)

( $V_{CC}$  = 5.0 V,  $T_A$  = 0°C to 70°C unless otherwise specified. Typical value is measured at  $T_A$  = 25°C.)

#### **Switching Characteristics**

| Symbol           | Parameter  | Device                             | Test Conditions  | Min.  | Тур.   | Max. | Unit |
|------------------|--|------------------------------------|--|-------|--------|------|------|
|                  |  | 6N139M                             | $R_L = 270 \Omega$ , $I_F = 12 \text{ mA}$   |       | 0.2    | 2    |      |
|                  |  | HCPL2730M,<br>HCPL2731M            | $R_L = 270 \ \Omega, I_F = 12 \ \text{mA}$   |       | 0.5    | 3    |      |
|                  | Propagation Delay Time to Logic  | 6N138M                             | $R_L = 2.2 \text{ k}\Omega, I_F = 1.6 \text{ mA}$  |       | 1.0    | 15   |      |
| t <sub>PHL</sub> | LOW <sup>(4)</sup> (Fig. 15)   | HCPL2730M,<br>HCPL2731M            | $R_L = 2.2 \text{ k}\Omega, I_F = 1.6 \text{ mA}$  |       | 2.5    | 25   | μs   |
|                  |  | 6N139M                             | $R_L = 4.7 \text{ k}\Omega, I_F = 0.5 \text{ mA}$  |       | 2.5    | 30   |      |
|                  |  | HCPL2731M                          | $R_L = 4.7 \text{ k}\Omega, I_F = 0.5 \text{ mA}$  |       | 8.4    | 120  |      |
|                  |  | 6N139M                             | $R_L$ = 270 Ω, $I_F$ = 12 mA   |       | 1.3    | 10   |      |
|                  | Propagation Delay Time to Logic HIGH <sup>(4)</sup> (Fig. 15)                  | HCPL2730M,<br>HCPL2731M            | $R_L = 270 \ \Omega, I_F = 12 \ \text{mA}$   |       | 1.0    | 15   |      |
| t <sub>PLH</sub> |  | 6N138M,<br>HCPL2730M,<br>HCPL2731M | $R_L = 2.2 \text{ k}\Omega, I_F = 1.6 \text{ mA}$  |       | 7.3    | 50   | μs   |
|                  |  | 6N139M,<br>HCPL2731M               | $R_L$ = 4.7 kΩ, $I_F$ = 0.5 mA   |       | 13.6   | 90   |      |
| CM <sub>H</sub>  | Common Mode<br>Transient Immunity<br>at Logic High <sup>(5)</sup><br>(Fig. 16) | All                                | $I_F = 0 \text{ mA}, IV_{CM}I = 10 V_{P-P},$ $R_L = 2.2 \text{ k}\Omega, T_A = 25^{\circ}\text{C}$ | 1,000 | 10,000 |      | V/µs |
| CM <sub>L</sub>  | Common Mode<br>Transient Immunity<br>at Logic Low <sup>(5)</sup><br>(Fig. 16)  | All                                | $I_F$ = 1.6 mA, $IV_{CM}I$ = 10 $V_{P-P}$ , $R_L$ = 2.2 k $\Omega$ , $T_A$ = 25°C                  | 1,000 | 10,000 |      | V/µs |

#### Note:

5. Common mode transient immunity in logic HIGH level is the maximum tolerable (positive) dV<sub>cm</sub>/dt on the leading edge of the common mode pulse signal V<sub>CM</sub>, to assure that the output will remain in a logic HIGH state (i.e., V<sub>O</sub> > 2.0 V). Common mode transient immunity in logic LOW level is the maximum tolerable (negative) dV<sub>cm</sub>/dt on the trailing edge of the common mode pulse signal, V<sub>CM</sub>, to assure that the output will remain in a logic LOW state (i.e., V<sub>O</sub> < 0.8 V).</p>

#### **Electrical Characteristics** (Continued)

Isolation Characteristics (T<sub>A</sub> = 25°C unless otherwise specified.)

| Symbol           | Parameter  | Device                  | Test Conditions  | Min.  | Тур.             | Max. | Unit               |
|------------------|--|-------------------------|--|-------|------------------|------|--------------------|
| V <sub>ISO</sub> | Withstand Insulation<br>Test Voltage <sup>(6)(7)</sup>   | All                     | RH $\leq$ 50%, T <sub>A</sub> = 25°C, I <sub>I-O</sub> $\leq$ 10 $\mu$ A, t = 1 min, f = 50 Hz | 5,000 |                  |      | VAC <sub>RMS</sub> |
| R <sub>I-O</sub> | Resistance (Input to Output) <sup>(6)</sup>              | All                     | V <sub>I-O</sub> = 500 V <sub>DC</sub>   |       | 10 <sup>11</sup> |      | Ω                  |
| C <sub>I-O</sub> | Capacitance (Input to Output) <sup>(6)(8)</sup>          | All                     | f = 1 MHz, V <sub>I-O</sub> = 0 V  |       | 1                |      | pF                 |
| I <sub>I-I</sub> | Input-Input Insulation<br>Leakage Current <sup>(9)</sup> | HCPL2731M               |  |       | 0.005            |      | μA                 |
| R <sub>I-I</sub> | Input-Input<br>Resistance <sup>(9)</sup>                 |                         | V <sub>I-I</sub> = 500 V <sub>DC</sub>   |       | 10 <sup>11</sup> |      | Ω                  |
| C <sub>I-I</sub> | Input-Input<br>Capacitance <sup>(9)</sup>                | HCPL2730M,<br>HCPL2731M | f = 1 MHz  |       | 0.03             |      | pF                 |

#### Notes:

- 6. Device is considered a two terminal device: Pins 1, 2, 3 and 4 are shorted together and Pins 5, 6, 7 and 8 are shorted together.
- 7.  $5000 \text{ VAC}_{RMS}$  for 1 minute duration is equivalent to  $6000 \text{ VAC}_{RMS}$  for 1 second duration.
- 8. For dual channel devices,  $C_{I-O}$  is measured by shorting pins 1 and 2 or pins 3 and 4 together and pins 5 through 8 shorted together.
- 9. Measured between pins 1 and 2 shorted together, and pins 3 and 4 shorted together.

### **Electrical Characteristics** (Continued)

T<sub>A</sub> = 25°C unless otherwise specified

Current Limiting Resistor Calculations:

R<sub>1</sub> (Non-Invert) =  $V_{\underline{CC1}} - V_{\underline{DF}} - V_{\underline{OL1}}$ 

 $R_1 \text{ (Invert)} = V_{\underline{CC1}} - V_{OH1} - V_{DF}$   $I_F$ 

 $R_2 = V_{CC2} - V_{OLX} (@ I_L - I_2)$ 

#### Where:

V<sub>CC1</sub> = Input Supply Voltage

V<sub>CC2</sub> = Output Supply Voltage

V<sub>DF</sub> = Diode Forward Voltage

V<sub>OL1</sub> = Logic "0" Voltage of Driver

V<sub>OH1</sub> = Logic "1" Voltage of Driver

I<sub>F</sub> = Diode Forward Current

V<sub>OLX</sub> = Saturation Voltage of Output Transistor

I<sub>L</sub> = Load Current Through Resistor R<sub>2</sub>

I<sub>2</sub> = Input Current of Output Gate

| INPUT     |          |                    |               | R <sub>2</sub> (Ω | ) @ OUT | PUT CO | NFIGUR | ATION  |          |      |  |  |  |  |      |      |     |      |      |      |     |
|-----------|----------|--------------------|---------------|-------------------|---------|--------|--------|--------|----------|------|--|--|--|--|------|------|-----|------|------|------|-----|
|           | URATION  | R <sub>1</sub> (Ω) | CMOS<br>@ 5 V | CMOS<br>@ 10 V    | 74XX    | 74LXX  | 74SXX  | 74LSXX | 74HXX    |      |  |  |  |  |      |      |     |      |      |      |     |
| смоѕ      | NON-INV. | 2000               |               |                   |         |        |        |        |          |      |  |  |  |  |      |      |     |      |      |      |     |
| @ 5 V     | INV.     | 510                |               |                   |         |        |        |        |          |      |  |  |  |  |      |      |     |      |      |      |     |
| смоѕ      | NON-INV. | 5100               |               |                   |         |        |        |        |          |      |  |  |  |  |      |      |     |      |      |      |     |
| @ 10 V    | INV.     | 4700               |               |                   |         |        |        |        |          |      |  |  |  |  |      |      |     |      |      |      |     |
|           | NON-INV. | 2200               |               |                   |         |        |        |        |          |      |  |  |  |  |      |      |     |      |      |      |     |
| 74XX      | INV.     | 180                |               |                   |         |        |        |        |          |      |  |  |  |  |      |      |     |      |      |      |     |
| - 41 2/2  | NON-INV. | 1800               | 4000          | 4000              | 4000    | 4000   | 4000   | 4000   | 4000     | 4000 |  |  |  |  | 0000 | 4000 | 750 | 4000 | 4000 | 4000 | 500 |
| 74LXX     | INV.     | 100                | 1000          | 2200              | 750     | 1000   | 1000   | 1000   | 560      |      |  |  |  |  |      |      |     |      |      |      |     |
| - 40VV    | NON-INV. | 2000               |               |                   |         |        |        |        |          |      |  |  |  |  |      |      |     |      |      |      |     |
| 74SXX     | INV.     | 360                |               |                   |         |        |        |        |          |      |  |  |  |  |      |      |     |      |      |      |     |
| -41.000   | NON-INV. | 2000               |               |                   |         |        |        |        | <b>\</b> |      |  |  |  |  |      |      |     |      |      |      |     |
| 74LSXX    | INV.     | 180                |               |                   |         |        |        |        |          |      |  |  |  |  |      |      |     |      |      |      |     |
| - 4113/3/ | NON-INV. | 2000               |               |                   |         |        |        |        |          |      |  |  |  |  |      |      |     |      |      |      |     |
| 74HXX     | INV.     | 180                |               |                   |         |        |        |        |          |      |  |  |  |  |      |      |     |      |      |      |     |

Fig. 3 Resistor Values for Logic Interface

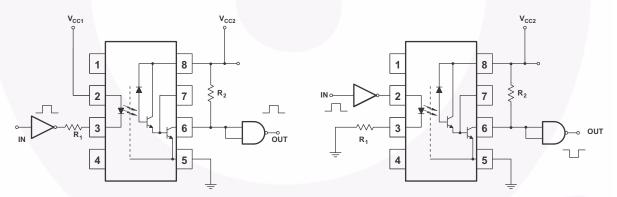


Fig. 4 Non-Inverting Logic Interface in 5 Inverting Logic in Fig. 5 Inverting Logic Interface

#### **Typical Performance Curves**




Fig. 6 LED Forward Current vs. Forward Voltage




Fig. 8 Current Transfer Ratio vs. Forward Current (6N138M / 6N139M Only)




Fig. 10 Current Transfer Ratio vs. Base-Emitter Resistance (6N138M / 6N139M Only)




Fig. 7 LED Forward Voltage vs. Temperature




Fig. 9 Normalized Current Transfer Ratio vs. Ambient Temperature (6N138M / 6N139M Only)




Fig. 11 Output Current vs. Input Diode Forward Current

(6N138M / 6N139M Only)

## **Typical Performance Curves (Continued)**




Fig. 12 Output Current vs Output Voltage (6N138M / 6N139M Only)




Fig. 13 Logic Low Supply Current vs. Input Diode Forward Current (6N138M / 6N139M Only)





Fig. 14 Propagation Delay vs. Temperature (6N138M / 6N139M Only)

## **Test Circuits** Pulse Generator tr = 5 ns $Z_O = 50 \Omega$ 10% Duty Noise Shield Pulse Generator tr = 5 ns $Z_0 = 50 \Omega$ 10% Duty 8 Cycle <sup>1</sup>/<sub>f</sub> < 100 μs 0.1 μF 7 Cycle 1/<sub>f</sub> < 100 µs $C_{L} = 15 pF^{2}$ 6 6 IF ⊸ MONITOR 0.1 uF I<sub>F</sub> Monitor 5 GND GND 4 4 5 CL = 15 pF\* Test Circuit for 6N138M, 6N139M Test Circuit for HCPL2730M and HCPL2731M Fig. 15 Switching Time Test Circuit Noise Shield 8 2 7 0.1 µF 3 6 3 6 VF2 5 5 4 4 Pulse Gen Pulse Gen Test Circuit for 6N138M and 6N139M Test Circuit for HCPL2730M and HCPL2731M Switch at A: IF = 0 mA

Fig. 16 Common Mode Immunity Test Circuit

Switch at B : I<sub>F</sub> = 1.6 mA

#### **Reflow Profile**

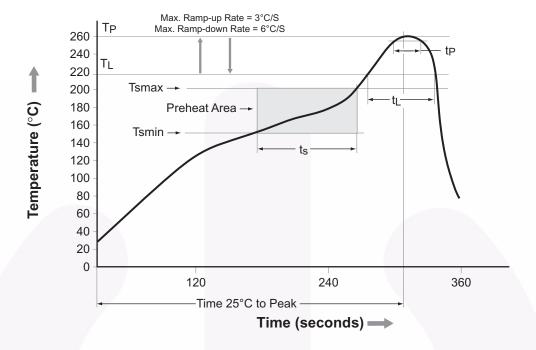

| Profile Freature  | Pb-Free Assembly Profile |  |  |
|---|--------------------------|--|--|
| Temperature Min. (Tsmin)                                  | 150°C                    |  |  |
| Temperature Max. (Tsmax)                                  | 200°C                    |  |  |
| Time (t <sub>S</sub> ) from (Tsmin to Tsmax)              | 60-120 seconds           |  |  |
| Ramp-up Rate (t <sub>L</sub> to t <sub>P</sub> )          | 3°C/second max.          |  |  |
| Liquidous Temperature (T <sub>L</sub> )                   | 217°C                    |  |  |
| Time (t <sub>L</sub> ) Maintained Above (T <sub>L</sub> ) | 60-150 seconds           |  |  |
| Peak Body Package Temperature                             | 260°C +0°C / -5°C        |  |  |
| Time (t <sub>P</sub> ) within 5°C of 260°C                | 30 seconds               |  |  |
| Ramp-down Rate (T <sub>P</sub> to T <sub>L</sub> )        | 6°C/second max.          |  |  |
| Time 25°C to Peak Temperature                             | 8 minutes max.           |  |  |

## **Ordering Information**

| Part Number | Package   | Packing Method                       |
|-------------|---|--------------------------------------|
| 6N138M      | DIP 8-Pin   | Tube (50 units per tube)             |
| 6N138SM     | SMT 8-Pin (Lead Bend)                                     | Tube (50 units per tube)             |
| 6N138SDM    | SMT 8-Pin (Lead Bend)                                     | Tape and Reel (1,000 units per reel) |
| 6N138VM     | DIP 8-Pin, DIN EN/IEC 60747-5-5 Option                    | Tube (50 units per tube)             |
| 6N138SVM    | SMT 8-Pin (Lead Bend), DIN EN/IEC 60747-5-5 Option        | Tube (50 units per tube)             |
| 6N138SDVM   | SMT 8-Pin (Lead Bend), DIN EN/IEC 60747-5-5 Option        | Tape and Reel (1,000 units per reel) |
| 6N138TVM    | DIP 8-Pin, 0.4" Lead Spacing, DIN EN/IEC 60747-5-5 Option | Tube (50 units per tube)             |
| 6N138TSVM   | SMT 8-Pin, 0.4" Lead Spacing, DIN EN/IEC 60747-5-5 Option | Tube (50 units per tube)             |
| 6N138TSR2VM | SMT 8-Pin, 0.4" Lead Spacing, DIN EN/IEC 60747-5-5 Option | Tape and Reel (1,000 units per reel) |

#### Note:

The product orderable part number system listed in this table also applies to the 6N139M, HCPL2730M and HCPL2731M product families.

## **Marking Information**






Figure 17. Top Mark


| Definitions |   |  |  |  |  |
|-------------|---|--|--|--|--|
| 1           | Fairchild Logo  |  |  |  |  |
| 2           | Device Number   |  |  |  |  |
| 3           | DIN EN/IEC60747-5-5 Option (only appears on component ordered with this option) |  |  |  |  |
| 4           | Two Digit Year Code, e.g., '16'   |  |  |  |  |
| 5           | Two Digit Work Week Ranging from '01' to '53'                                   |  |  |  |  |
| 6           | Assembly Package Code   |  |  |  |  |


## **Carrier Tape Specifications (Option SD)**

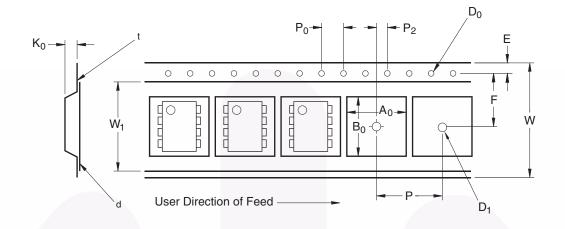


| Symbol         | Description                     | Dimension in mm |
|----------------|---------------------------------|-----------------|
| W              | Tape Width                      | 16.0 ± 0.3      |
| t              | Tape Thickness                  | $0.30 \pm 0.05$ |
| P <sub>0</sub> | Sprocket Hole Pitch             | 4.0 ± 0.1       |
| D <sub>0</sub> | Sprocket Hole Diameter          | 1.55 ± 0.05     |
| E              | Sprocket Hole Location          | 1.75 ± 0.10     |
| F              | Pocket Location                 | 7.5 ± 0.1       |
| P <sub>2</sub> |                                 | 2.0 ± 0.1       |
| Р              | Pocket Pitch                    | 12.0 ± 0.1      |
| A <sub>0</sub> | Pocket Dimensions               | 10.30 ±0.20     |
| B <sub>0</sub> |                                 | 10.30 ±0.20     |
| K <sub>0</sub> |                                 | 4.90 ±0.20      |
| W <sub>1</sub> | Cover Tape Width                | 13.2 ± 0.2      |
| d              | Cover Tape Thickness            | 0.1 max         |
|                | Max. Component Rotation or Tilt | 10°             |
| R              | Min. Bending Radius             | 30              |

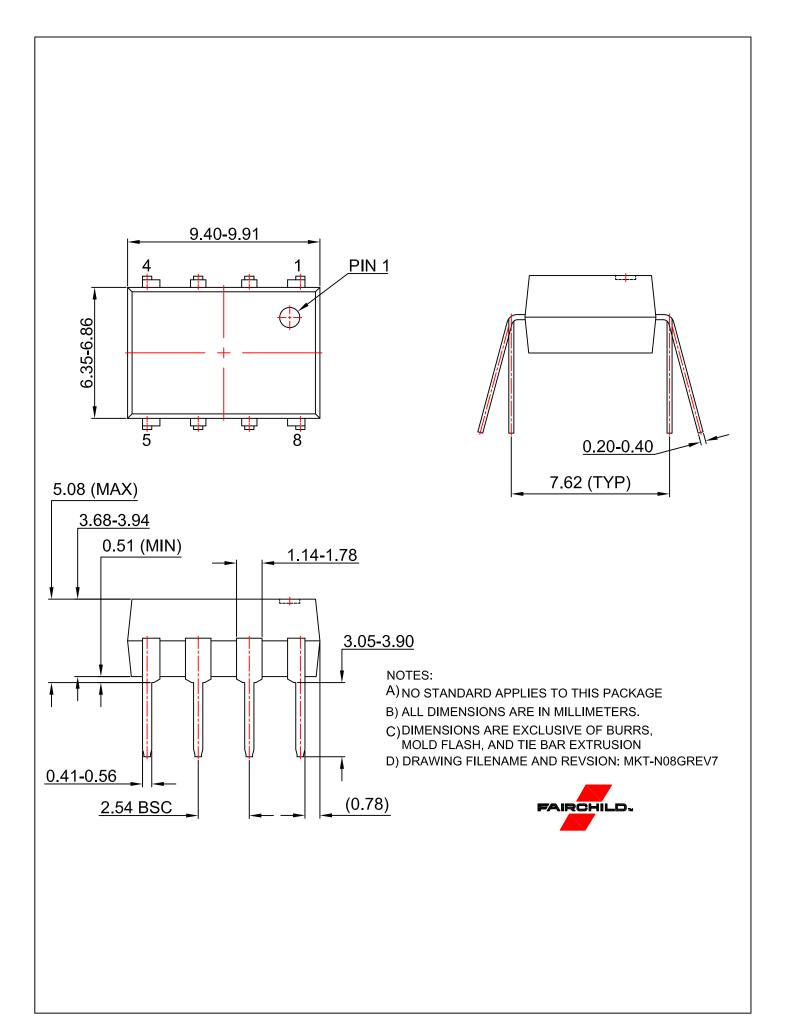






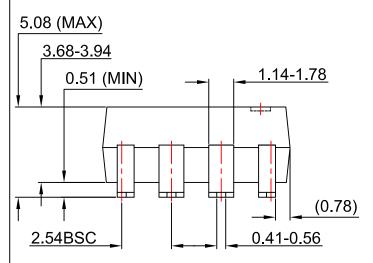






#### NOTES:

- A) NO STANDARD APPLIES TO THIS PACKAGE
- B) ALL DIMENSIONS ARE IN MILLIMETERS.
- C) DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSION
- D) DRAWING FILENAME AND REVSION: MKT-N08Hrev7.



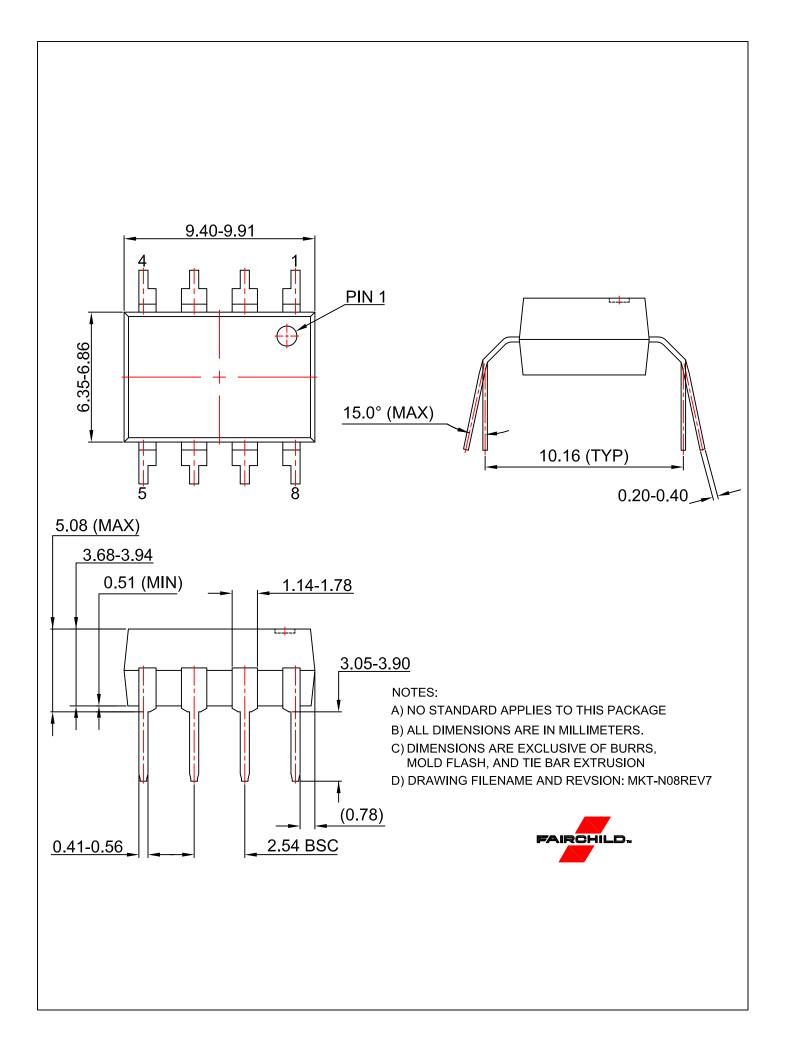

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdt/Patent-Marking.pdf">www.onsemi.com/site/pdt/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and exp

#### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800-282-9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## **ON Semiconductor:**

<u>6N138SDM 6N138SM 6N139SDM 6N139SM 6N139SM 6N139SM 6N139SVM 6N139S</u>