

尺寸 Size: 92mmx92mmx25mm

风量 Airflow: 39-63m³/hr
23-37CFM

重量 Weight: 268g

噪音 Noise: 23-40dBA

风叶 Impeller Material: PBT Thermoplastic Black,UL94-V0

外框 Frame: Aluminum Alloy



端子 Terminals: 0.5mm

引线 Lead Wire: AWG#22 UL 1569(Optional)

马达 Motor: Shaded Pole Induction Motor

温度范围 Operating Temperature: -10°C~+65°C

Model (型号)	Bearing System (轴承型式)	Voltage VAC (电压)	Freq. Hz (频率)	Current A (电流)	Power W (功率)	Speed RPM (转速)	Noise dBA (噪音)	Air Flow (风量)		Phase (相数)	Capacitor (电容)
								M3/hr	CFM		
G9225HA ₁ S	Sleeve	100/125	50/60	0.18/0.16	16/13	2350/2800	34/40	51/63	30/37	1	/
G9225HA ₂ S		200/240	50/60	0.09/0.08	16/13	2350/2800	34/40	51/63	30/37	1	/
G9225HA ₁ B	Ball	100/125	50/60	0.18/0.16	13/11	2350/2800	34/40	51/63	30/37	1	/
G9225HA ₂ B		200/240	50/60	0.09/0.08	13/11	2350/2800	34/40	51/63	30/37	1	/
G9225MA ₁ S	Sleeve	100/125	50/60	0.14	7/6	1800/2300	23/30	39/51	23/30	1	/
G9225MA ₂ S		200/240	50/60	0.07	7/6	1800/2300	23/30	39/51	23/30	1	/
G9225MA ₁ B	Ball	100/125	50/60	0.14	7/6	1800/2300	23/30	39/51	23/30	1	/
G9225MA ₂ B		200/240	50/60	0.07	7/6	1800/2300	23/30	39/51	23/30	1	/

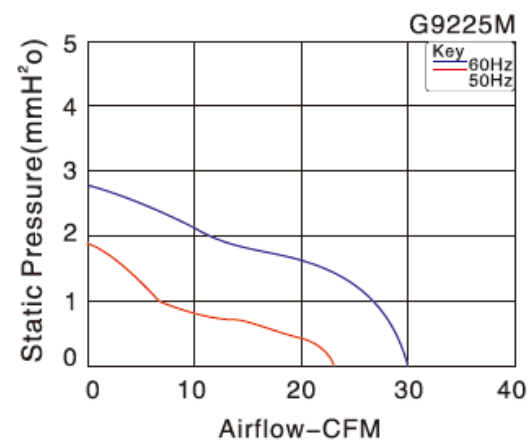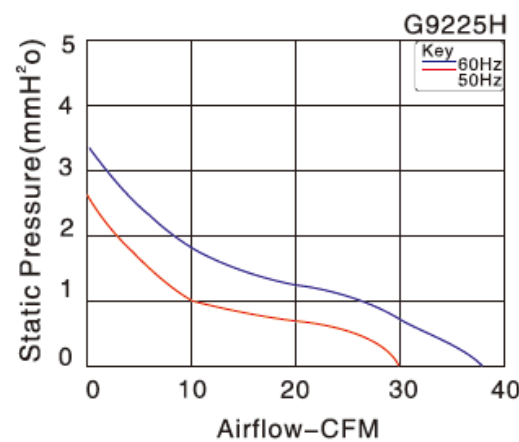

Fan Accessories

