

REVISION RECORD			
REV	ECN	DESCRIPTION	DATE

Technical characteristics:

Specifications

DIN EN 60 664-1





DIN EN 61 984

Inserts

- 01. Number of contacts :5
- 02. Rated Current :16A
- 03. Rated Voltage :400V
- 04. Pollution degree :3
- 05. Rated impulse voltage :6kv
- 06. Insulation resistance :≥10Ω
- 07. Material:Polycarbonate
- 08. Rated voltage acc. to UL/CSA:600V
- 09. Limiting temperatures : -40℃~+125℃
- 10. Flammability acc. to UL94:V0
- 11. Mechanical working life (mating cycles) :≥500

Contacts

- 01. Material:Copper alloy
- 02. Surface:hard-silver plated
- 03. Contact resistance :≤5mΩ
- 04. Terminal :Push-in terminal
- 05. Wire gauge :0.14-2.5mm² (AWG 26-14)
- 06. Stripping length :12mm (Cold pressed terminals)
- 07. RoHS Compliance

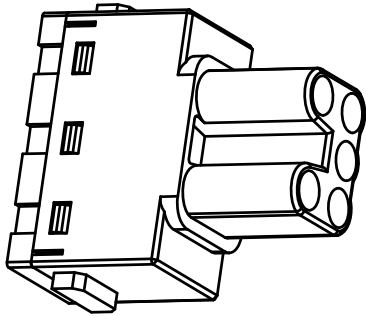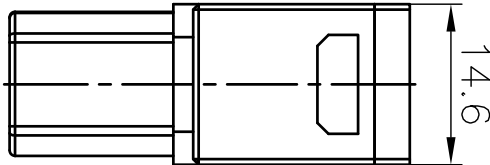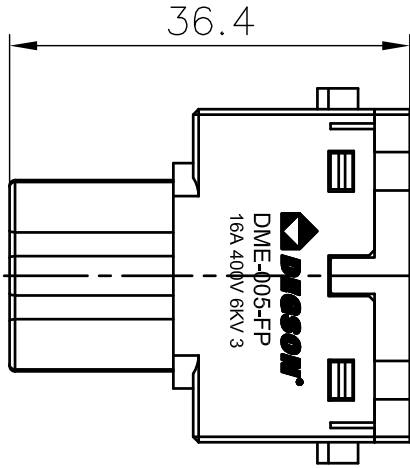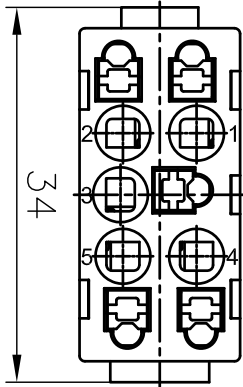

DETACHED LISTS			
PART NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD	
APPR: Huang JS 2020.12.03	NAME:	DME-005-FP-Z1-00A(H)	
CHKD: Yang SH 2020.12.03	TITLE: CUSTOMER DRAWING	REV	DO
DFT: Lu JK 2020.12.03	DRAWING NO.:	/	
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SCALE
		1:1	1.5:1