


Data sheet

Commercial Art.No.: 5D.203.8055.0

terminal block WTPN 2.5 SNK01

terminal block WTPN 2.5 SNK01 rated voltage 400 V, push-In connection//true, number of levels 1, number of clamp positions per level 2, nominal cross section 2.5 mm², mounting method DIN rail (top hat rail), color grey, width/grid dimension 30.5 mm, inflammability class of insulation material acc. with ul94 V0

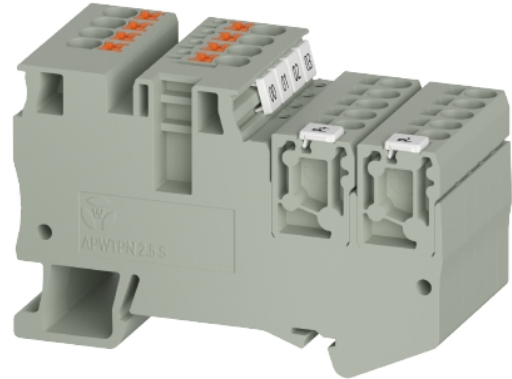

Commercial Art.No.	5D.203.8055.0
EAN	4049088718830
Order Unit	1

certificates / approvals



Technical data

general

nominal cross section	2.5 mm ²
color	grey
number of levels	1
number of clamp positions per level	2
width/grid dimension	30.5 mm
insulating housing	PA
inflammability class of insulation material acc. with UL94	V0
mounting method	DIN rail (top hat rail)

technical data

rated voltage	400 V
rated impulse voltage	8 kV
pollution degree	3
closing plate required	no
type of insulation material	thermoplastic
length	68.5 mm
width	30.5 mm

connection data

connection type	push-In connection//true
connection type 1	plug-in connection
wire strip length	10 mm

technical data UL/CSA

cross section UL	-
------------------	---

voltage UL	300 V
cross section CSA	-
voltage CSA	300 V

classification



ETIM 9.0	EC001284
----------	----------

product compliance

REACH-SVHC conformity status	compliant
------------------------------	-----------

Accessories

Commercial Art.No.:	Article-type description:	Description:
0D.203.3227.5	jumper bar IVB WTPN 2,5-2	jumper bar IVB WTPN 2,5-2 modular spacing 5.1 mm, insulated yes, number of poles 2, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.203.3327.5	jumper bar IVB WTPN 2,5-3	jumper bar IVB WTPN 2,5-3 modular spacing 5.1 mm, insulated yes, number of poles 3, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.203.3427.5	jumper bar IVB WTPN 2,5-4	jumper bar IVB WTPN 2,5-4 modular spacing 5.1 mm, insulated yes, number of poles 4, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.203.3527.5	jumper bar IVB WTPN 2,5-5	jumper bar IVB WTPN 2,5-5 modular spacing 5.1 mm, insulated yes, number of poles 5, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.203.4027.5	jumper bar IVB WTPN 2,5-10	jumper bar IVB WTPN 2,5-10 modular spacing 5.1 mm, insulated yes, number of poles 10, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.203.5027.5	jumper bar IVB WTPN 2,5-20	jumper bar IVB WTPN 2,5-20 modular spacing 5.1 mm, insulated yes, number of poles 20, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.203.5427.5	jumper bar IVB WTPN 2.5 500T	jumper bar IVB WTPN 2.5 500T modular spacing 5.1 mm, insulated yes, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.203.8055.5	test plug PS 2.5	test plug PS 2.5 color red
0D.203.8155.5	spacer SPS 2.5	spacer SPS 2.5 color red
0D.202.7381.0	marking strips WML 7.4/60	marking strips WML 7.4/60 color white
0D.203.7156.0	marking plate WMP 5,10-5,8	marking plate WMP 5,10-5,8 modular spacing 5.1 mm, color white

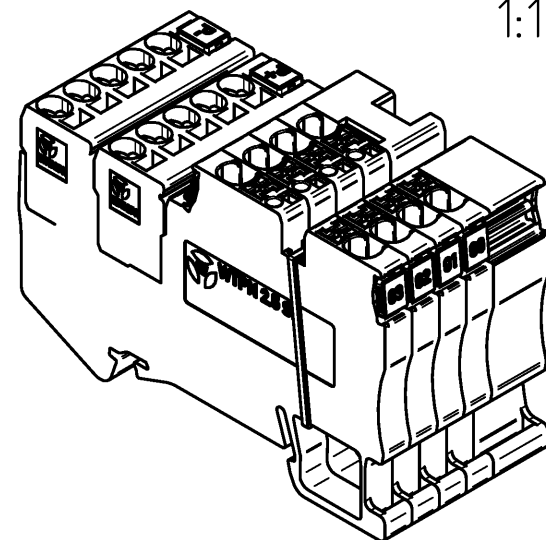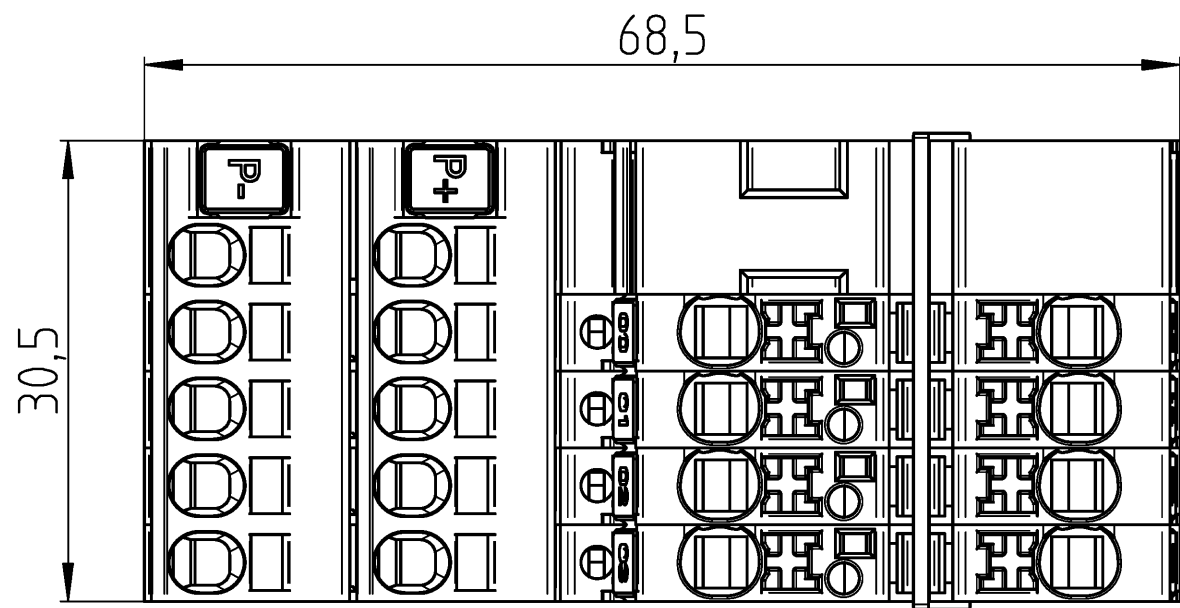

Bestell-Nr. /order no.	Typ /type	Farbe /colour
5D.203.8055.0	WTPN 2.5 SNK01	grau / grey

Weitere Daten siehe KATALOG oder eKatalog additional data see CATALOG or eCATALOG				www.wieland-electric.com eshop.wieland-electric.com					
Tolerierung Size ISO 14405 © / Tolerance system Size ISO 14405 ©. (This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances).				ja/yes ☒ Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten. Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!					
Freitoleranz nach General tolerance		CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed		1. Verwendung: First Use:		Blatt: 1 von 1 Sheet: of 1			
	/		Werkstoff / Material			Tag/Date	Name	Zeichnung Nr. / Drawing No. 5D.203.8055.0 13K	Index
	/		gezeichnet/ drawn	08.05.2025	Hallet				
	/		Elektronische Freigabe Electronic Release			Maße in mm / Dimensions are in mm			
	/								
	/	Maßstab / Scale							
	/	2:1							
	/	Vol.	mm ³	Ofl./Srf.	mm ²	Ersatz für / Replacement for:			
	/				Type	Benennung/Title			
	/				KLEMMENBLOCK				
	/				sensor terminal block				
Index	Datum / Blatt Date / Sheet			wieland					
Änderung / Revision									